

LEGENDA | LEGEND | LÉGENDE

- 1 Camada protetora PROTECTION PLUS tratamento anti-manchas e prot. UV
PROTECTION PLUS Protective layer anti-stain treatment and UV protection
Couche de protection PROTECTION PLUS traitement anti-taches et protection UV
- 2 Camada de desgaste - 0,5 mm
Clear wear layer - 0,5 mm
Couche d'usure - 0,5 mm
- 3 Filme impresso em alta qualidade e definição
HD design print layer
Couche d'impression HD
- 4 Núcleo rígido do SPC (sem orto-ftalato)
Rigid SPC Core (Ortho-phthalates)
Noyau CPS rigide (sans ortho-phthalate)
- 5 Tela de IXPE 1,5 mm
1,5 mm IXPE underlay
Sous-couche 1,5 mm IXPE

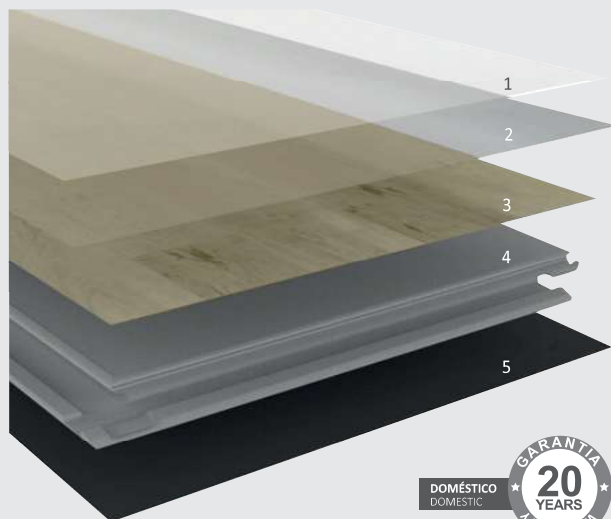




Tabela técnica | Technical table | Table technique

DIMENSÃO Size Dimension (mm)	ESPESSURA Thickness Épaisseur (mm)	PCS / CAIXA PCS / Boxes PCS / Boîtes	CAIXA Box Boîte (m²)	CAIXA Box Boîte (Kgs)	CAMADA DE DESGASTE Wear layer Couche d'usure (mm)	CAIXAS/ PALETTE Boxes/Pallet Boîtes/Palette	PALETTE Pallet / Palette (m²)
1220 x 182	6,5 1,5 Tela Underlay Sous-couche	8	1,776	18,76	0,5	50	88,81

TESTES DE DESEMPENHO Test item Tests de performance		NORMAS Standard Normes		RESULTADOS Results Résultats	
Tipo de Bisel Type of Bevel Type de biseau				Micro Bisel Micro Bevel Micro Biseau	
Tratamento de superfície Surface treatment Traitement de surface				Poros Real Wood Real wood Texture Texture Real wood	
Camada de desgaste Wear layer Couche d'usure				0,5 mm	
Nível de Uso Usage Level Niveau d'utilisation		EN 685		23 33	
Estabilidade Dimensional Dimensional stability Stabilité dimensionnelle		ISO 23999:2018		Dir. X= 0,05% Dir. Y= 0,05%	
Ondulação Curling Gondolage		ISO 23999:2018		0,50mm	
Classe de Abrasão Abrasion Class Classe d'abrasion		EN 660-2		Classe P	
Resistência à abrasão Abrasion resistance Résistance à l'abrasion		EN 13329:2016 Annex E		AC5	
Resistência ao fogo Fire resistance Résistance au feu		EN 13501-1		Bfl -s1	
Qualidade do ar interior Indoor air quality Qualité de l'air intérieur		ISO 16000		A+	
COV (Composto orgânico Volátil) VOC (Volatile Organic Compounds)		FloorScore		Aprovado Approved Approuvé	
Metais pesados Soluble heavy metal Métaux lourds		ASTM F963-11		Aprovado Approved Approuvé	
Isolamento ao ruído de impacto Impact noise insulation Isolation contre le bruit d'impact		ISO 10140-3:2021 ISO 717-2:2020		Lnw=21 dB	
Indentação Residual Residual Indentation Indentation résiduelle		EN ISO 24343-1		≤ 0,10 mm	
Resistência à carga estática Static load resistance Résistance à la charge statique		EN 1815:2016		0,1 KV	
Emissão de formaldeído Formaldehyde Emission Emission de formaldéhyde		EN 717-1		E0	
Tipo de Clique Click Type Type de clic				Uniclic 4 lados 4 sides 4 côtés	
Absorção após submersão em água Absorption after submersion in water Absorption après immersion dans l'eau		EN 16511		0%	
Condutividade Térmica Thermal Conductivity Conductivité thermique		EN 12664:2001		0,112 (W/mK)	
Resistência Térmica Thermal resistance Résistance thermique		EN 12664:2001		0,058 (m².K)/W	
Resistência à exposição ao calor a 80°C / 180°F Heat exposure resistance 80°C / 180°F Résistance à l'exposition à la chaleur à 80°C / 180°F		ASTM 1700		Aprovado Approved Approuvé	
TOLERÂNCIAS: Tolerances: Tolérances:	Espessura Thickness Épaisseur			+/- 0.2mm	
	Largura Width Largeur			+/- 0.1mm	
	Comprimento Length Longueur			+/- 0.5mm	
NÚCLEO Core Noyau	Tipo de Núcleo Core Type Type de noyau			60% Pó de pedra + 20% PVC + 20% outros 60% Stone dust + 20% PVC + 20% others 60% Poudre de pierre + 20% PVC + 20% d'autres	
	Espessura Thickness Épaisseur			4.5 mm	
	Densidade Density Densité			≥ 2000kg/m³	
TELA DE ISOLAMENTO Isolation Underlay Sous-couche	Tipo Type			IXPE	
	Densidade Density Densité			66 kg/m³	
	Espessura Thickness Épaisseur			1.5mm	

(PT) Consulte as condições gerais de garantia em [gsfloors.pt](https://www.gsfloors.pt)
A cor e padrão dos pavimentos pode variar para o produto original.

(EN) Please check the general guarantee conditions on [gsfloors.pt](https://www.gsfloors.pt)
The colors and patterns of flooring can vary from the original product.

(FR) Consultez les conditions générales de garantie [gsfloors.pt](https://www.gsfloors.pt)
La couleur et le motif de revêtements du parquet peut varier du produit original

